
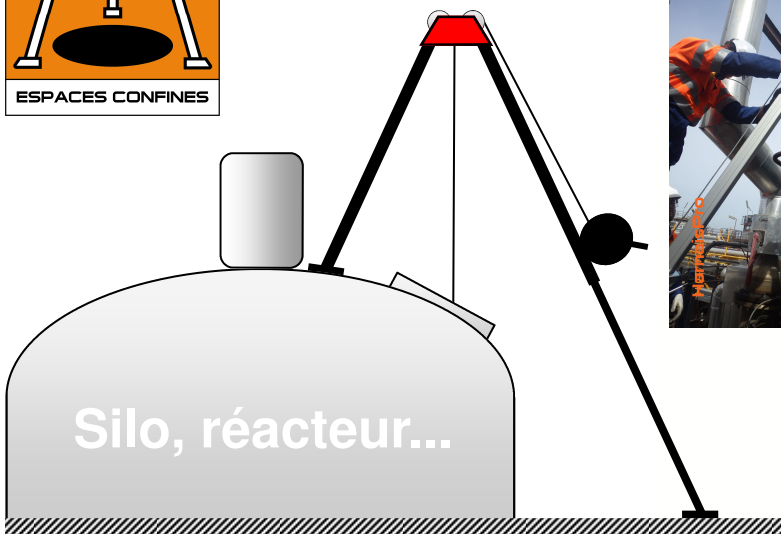


HarnaisPro

FICHE TECHNIQUE

REF HPTM13



Description :

TREPIED ALUMINIUM DE SECURITE ET DE LEVAGE, HAUTEUR DE TRAVAIL JUSQU'À 2,89 M. Trépied pour la sécurisation et le sauvetage de personnel travaillant en espaces confinés et/ou pour le levage de charges. Patins orientables antidérapants. Pieds télescopiques réglables sur 9 niveaux (compensation de la hauteur des ouvrages jusqu'à 1,10 m). Chaîne de sécurité reliant les 3 pieds. Tête de trépied équipée de 2 poulies de renvoi et de 3 points d'ancrage. Utilisable en zones EX. Descente et évacuation, capacité de 140 kg avec le treuil de sécurisation et de sauvetage de personne Réf HPRUP502A25 équipé d'un câble de 25m ou avec l'enrouleur antichute à câble avec dispositif de sauvetage incorporé Réf HPCRW30025 (et son support HPAT172). Levage de charge jusqu'à 500 kg avec le treuil Réf HPRUP502AT25 équipé d'un câble de 25m.

Utilisation :

Dispositif d'ancrage temporaire pour la sécurisation de personnes lors d'accès en espaces confinés (silos, réacteurs, cuves, réseaux d'assainissements, canalisations, puits de forage...), moyen de levage de charges.

Conformité à la réglementation :

Réglementation EPI 2016/425

Norme EN795/B : 2012

TS 16415/B : 2013

Caractéristiques :


- Hauteur de travail réglable de 179 à 289 cm.
- Diamètre du trou pris en charge de 173 à 271 cm.
- Distance entre les jambes réglable de 147 à 232 cm.
- Dimensions de transport : 190 x 30 x 30 cm.
- Poids : 37 kg.
- Force de rupture : 22 kN.
- Charge maximum admissible : 1000 kg.
- Sécurisation/évacuation de personnel avec treuil HPRUP520A25 et/ou HPCRW30025 : 140 kg maximum.
- Levage de charge avec treuil HPRUP520AT25 : 500 kg maximum.



HarnaisPro


FICHE TECHNIQUE

REF HPTM13

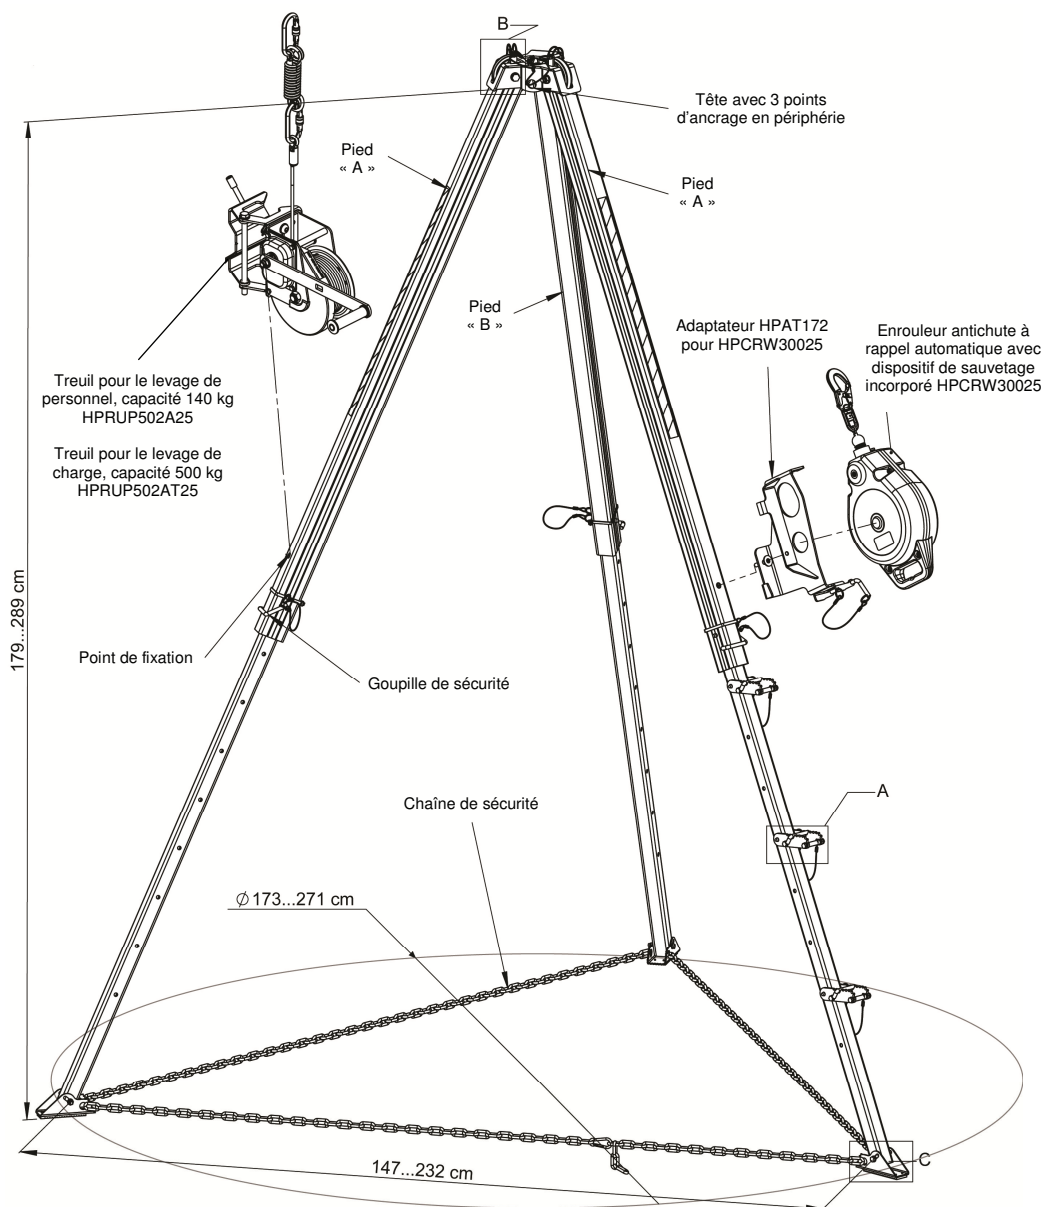

DETAIL A


Marche antidérapante pour l'accès à la tête de trépied

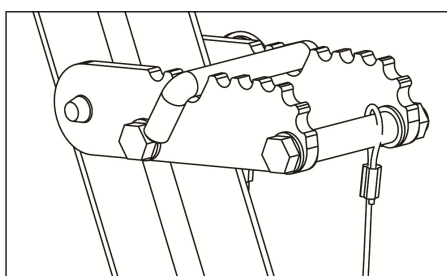

DETAIL B


Goupille de sécurité

Poulie de renvoi



DETAIL C

Patin antidérapant et orientable pour sol accidenté

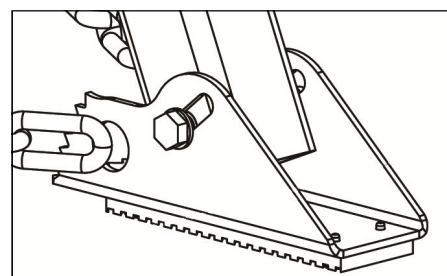

HarnaisPro

NIP: 525-00-08-577
REGON: 0000 42613
KRS: 000021982
Bank Account: PEKAO SA 84
1240 6074 1111 0000 4989 1458

QUALITY MANAGEMENT SYSTEM



ISO 9001:2015
AQAP 2110:2016

- Carries out research and development as well as commissioning, research services, expertise and manufacturing for chemical safety, state defense and security and industry: plant protection agents, biocide agents, veterinary agents, high-energy materials including explosives and light organic synthesis. Elaboration of evaluation and reports for plant protection agents and other active substances.



Nr J-753/8/2018



PL-J-753/8/2018

- Elaboration of analytical patterns for organic substances in pure and dilution forms.

GOOD LABORATORY PRACTICE



- Toxicology investigations
- Eco-toxicology investigations
- Investigations of physico-chemical properties, residues investigation, biodegradability investigation, biocide agents effectiveness evaluation.

ACCREDITATION BY PCA



AB 374

For the following research areas:

- explosives, pyrotechnic masses, and powders.
- chemical safety concerning introduction of chemical substances and agents as well as protection against static electricity.]

CONCESSION OF THE
MINISTRY OF THE INTERIOR
AND ADMINISTRATION
No. B – 036/2003



INSTITUTE OF INDUSTRIAL ORGANIC CHEMISTRY

03-236 Warsaw ul. Annopol 6
e-mail: ipo@ipo.waw.pl www.ipo.waw.pl

Tel. +48 228111231
Fax+48 228110799



Grzegorz Łaszkiwicz

Our reference: BC.502.5.18.2018.MW.16

Warsaw, 05.09.2018

Subject: **Assessment of capacity of safety tripod TM 13, in terms of protection against static electricity**

On the basis of the results of control tests taken upon your order in accordance with letter of 24.05.2018 (Protocol IPO no. 18/BCE/2018), it is concluded that:

For the requirements of protection against static electricity

Safety tripod TM 13 [Ref. no. AT015] with the following devices:

- rescue lifting device RUP 502-A [Ref. no. AT050-A]
- rescue lifting device RUP 503 [Ref. no. AT053]
- retractable type fall arrester CRW 300-G [Ref. no. CRW300-G] mounted on tripod leg using adapter AT 172 [Ref. no. AT172] or mounted to anchor point by means of detachable carabiner AZ017 [Ref. no. AZ017]
- retractable type fall arrester CRW 200-G [Ref. no. CRW200-G] mounted on tripod leg using holder AT 172 [Ref. no. AT172]
- retractable type fall arrester CRW 200-G [Ref. no. CRW200-G] mounted to anchor point by means of detachable carabiner AZ017 [Ref. no. AZ017]
- thickness of coating (paint) on metal casings of rescue lifting devices RUP 503 [Ref. no. AT053], retractable type fall arresters CRW 300-G [Ref. no. CRW300-G] and CRW 200-G [Ref. no. CRW200-G] and on tripod head not exceeding 0.2mm (requirement according to PN-E-05204:11994 p. 3.2.2.1 h/),
- area of warning labels on tripod legs not exceeding 50cm² (requirement according to PN-E-05204:1994 p. 3.2.2.1 f) and
- an effective earthing of the assembly of devices when in use (requirement according to PN-E-05204:1994 p. 3.2.2.3),

can be used in explosion hazardous areas 1, 2, 20, 21 and 22, classified in accordance with Regulation of the Minister of Economy on minimum requirements for safety and health protection at work related with a potential risk of occurrence of an explosive atmosphere in the workplace - Dz. U. 2010 No. 138, item 931, in which media of minimum ignition energy MEZ > 0.1mJ are operated.

In particular, the specified products are allowed to be used safely, in particular, in the presence of methane and coal dust, especially - in climatic conditions prevailing in underground mines (excavations assigned to "a", "b" and "c" explosive level of methane and to "A" and "B" coal dust explosive limit).

HarnaisPro

This statement is issued as it was found that products in question virtually cannot become charged with static electricity in specific conditions of their use.

Note: All metal elements of the devices producing capacitance above 10 pF should be interconnected to form a continuous electrical circuit with a resistance of no more than 100 Ω . When using the devices in explosion hazardous area make sure that the devices are effectively earthed before use. An appropriate notice should be included in Instructions for use of the device.